


ADDENDUM NUMBER ONE
TO
REQUEST FOR BIDS, CONTRACT DOCUMENTS, CONSTRUCTION
SPECIFICATIONS AND DRAWINGS
FOR CONSTRUCTION OF

SUSIE KING TAYLOR FREEDOM PARK AT JONES CREEK
WALKING TRAIL
FOR
LIBERTY COUNTY BOARD OF COMMISSIONERS

ACKNOWLEDGE RECEIPT OF THIS ADDENDUM BY INSERTING ITS NUMBER IN THE PROPOSAL. FAILURE TO DO SO MAY SUBJECT BONA FIDE PROPOSERS TO DISQUALIFICATION. THIS ADDENDUM FORMS A PART OF THE PROJECT DOCUMENTS; IT MODIFIES THEM AS FOLLOWS:

1. The paved area near the old boat ramp has been increased as shown in the caption below. The schedule of items has been increased to account for the increase in brick pavers. The bidder should use the attached schedule of items for submission of the bid.

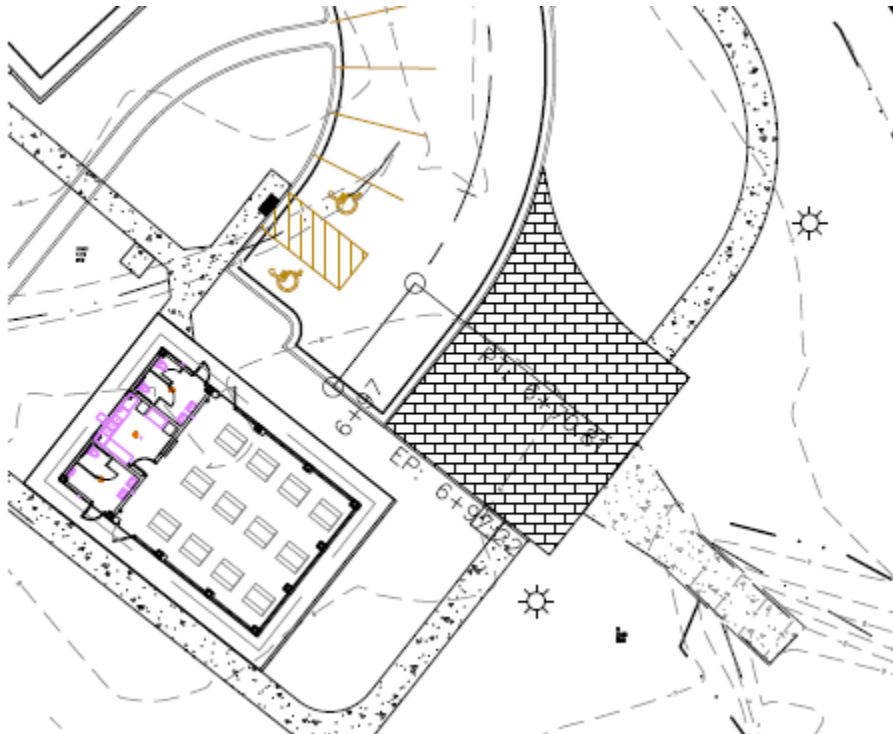

2. The plans have been amended to include the placement of approximately 150 feet of 4" PVC conduit under the sidewalk at locations established by the engineer. Most crossings will be placed in 10 to 20 feet long lengths. The Schedule of Items has been adjusted to include this item of work.

SCHEDULE OF ITEMS
SUSAN KING TAYLOR FREEDOM PARK AT JONES CREEK WALKING TRAIL
FOR LIBERTY COUNTY BOARD OF COMMISSIONERS

Item	Description	Quantity	Units	Unit Price	Item Price
1	Clearing and Grubbing	1	SUM		
2	Grading Modified	1	SUM		
3	6' Concrete Sidewalk (4" Thick)	1,655	SY		
4	Handicap Ramp	3	EA		
5	Sidewalk over Flume	3	EA		
6	Permeable Pavers w/Base	3,500	SF		
7	4" PVC Conduit	150	LF		
8	Concrete Washout (CSW)	1	EA		
9	Silt Fence - Type NS (Sd1-NS)	310	LF		
10	Silt Fence - Type S (Sd1-S)	3,000	LF		
11	Inlet Protection (Sd2-P)	4	EA		
12	Orange Safety Fence	305	LF		
13	Rolled Matting, Coconut (SS-HPEC)	1,350	SY		
14	Mulching (Ds1)	1.4	AC		
15	Temporary Grassing (Ds2)	1.4	AC		
16	Permanent Grassing (Ds3)	1.4	AC		
17	Mobilization (Max. 5%)	1	SUM		
GRAND TOTAL					
GRAND TOTAL IN WORDS					